

LOAD KING FIBERGLASS CONVEYOR

ROOFING CONVEYOR - THE PREMIER LINE



UNIT FEATURES

HEAD SECTION :

ALL ALUMINUM CONSTRUCTION W/ 1/4" BELT LAGGING
FOUR BOLD PILLOW BLOCK STYLE BEARING
STAINLESS STEEL SUPPORT PLATES & HINGED COVER
EMERGENCY STOP

TAIL SECTION :

ALL STAINLESS STEEL CONSTRUCTED GUARDS,
UTILIZES A STEEL V-GUIDED BELT PULLEY

OPTION :

ALUMINUM & STEEL COMBO OR ALL STEEL -
24' - 28' OVERALL BED SPACE

CRADLE :

17' STEEL 1-PIECE HEAVY DUTY CONSTRUCTION,
SUPPORTS CONVEYOR OR FRAME STRUCTURE

BELT :

PVC NON-CONDUCTIVE BELTING
STAINLESS STEEL PADDLES
BELT SPEED = 60' A MINUTE

CROSS SUPPORTS :

STAINLESS STEEL CONSTRUCTION -
RUBBER - COATED RETURN IDLER WHEELS EQUIPPED W/ BEARINGS
HYDRAULIC HOSE ROUTING THROUGHOUT FRAME STRUCTURE IS CAPTIVE IN HOLDERS
ALL STAINLESS STEEL HARDWARE, BOLTS, NUTS, ETC. HYDRAULIC STABILIZERS


360° ROTATION ERGONOMIC CONTROLS

ROTATIONAL GEAR BOX IS FIXED FOR LONGER HOSE LIFE

10' INTEGRATED SUB-BASE & MOUNTING DECK DESIGNED TO CARRY OPTIONAL FORKLIFT KIT

MAST CLEARANCE UP TO 70" BELT LOADED HEIGHT 18" +

FLUSH MOUNTED ROTATION COVER FOR EASIER
ACCESS TO ROTATION SYSTEM, NO STEEL PLATE TO TRIP OVER

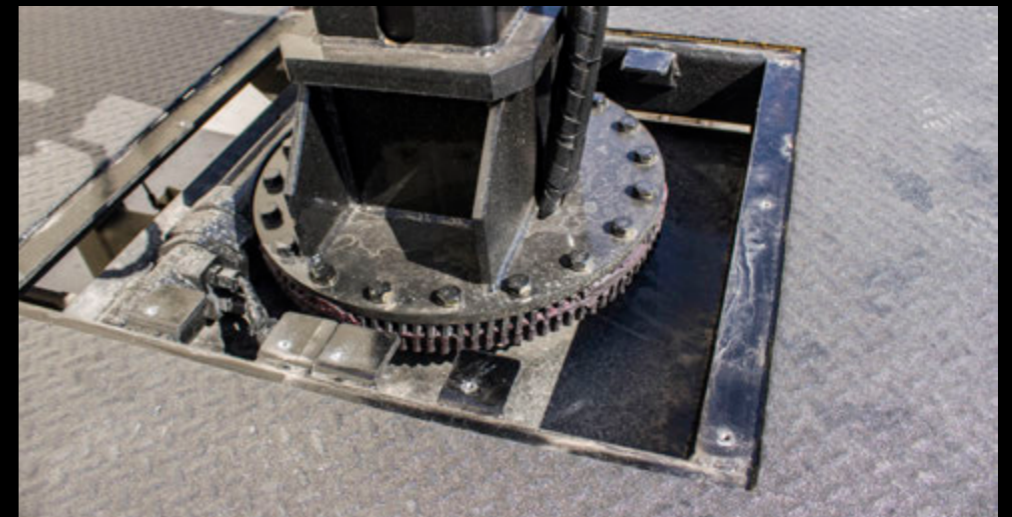

Make sure to ask about UOS' Rental-Purchase Option (RPO), one of the best in the business. This program gives customers options to rent equipment fast and allows you to use part of your rental expense toward the payment of the equipment.