


SPECS

207' MAX. VERTICAL REACH / 152' TIP HEIGHT
360 DEGREE WORKING AREA
AVAILABLE ON MANY DIFFERENT CHASSIS MAKES, MODELS
45-TON / 90,000 LBS. LIFTING CAPACITY
142' 5-SECTION FULLY-PROPORTIONAL TELESCOPIC BOOM
OPTIONAL DETACHABLE 2-MAN WORK PLATFORM
43,800 LBS. CRANE WEIGHT
JIB LENGTHS: 32'-55'
WINCH BARE DRUM PULL: 15,000 LBS.
OPERATOR CONTROLS: ROTATING CAB W/ CONTROL SEAT
OUT-AND-DOWN OUTRIGGERS:
21'2" FRONT OUTRIGGER SPREAD / 26'2" REAR OUTRIGGER SPREAD

DELUXE OPERATOR'S CAB:
GREER FULL-COLOR LMI DISPLAY, INTEGRAL TO REMOTE CONTROL, DIESEL HEATER,
BUBBLE LEVEL GAUGE, ENGINE START/STOP SWITCH,
VARIABLE SPEED THROTTLE SWITCH BURST-OF-SPEED WINCH

FULL-LENGTH ALL WELDED RIGID 4-PLATE FRAME DESIGN SUBFRAME
2-STAGE HYDRAULIC BOOM EXTENSION
OSHA-COMPLIANT HYDRAULIC YOKE 2-MAN WORK PLATFORM

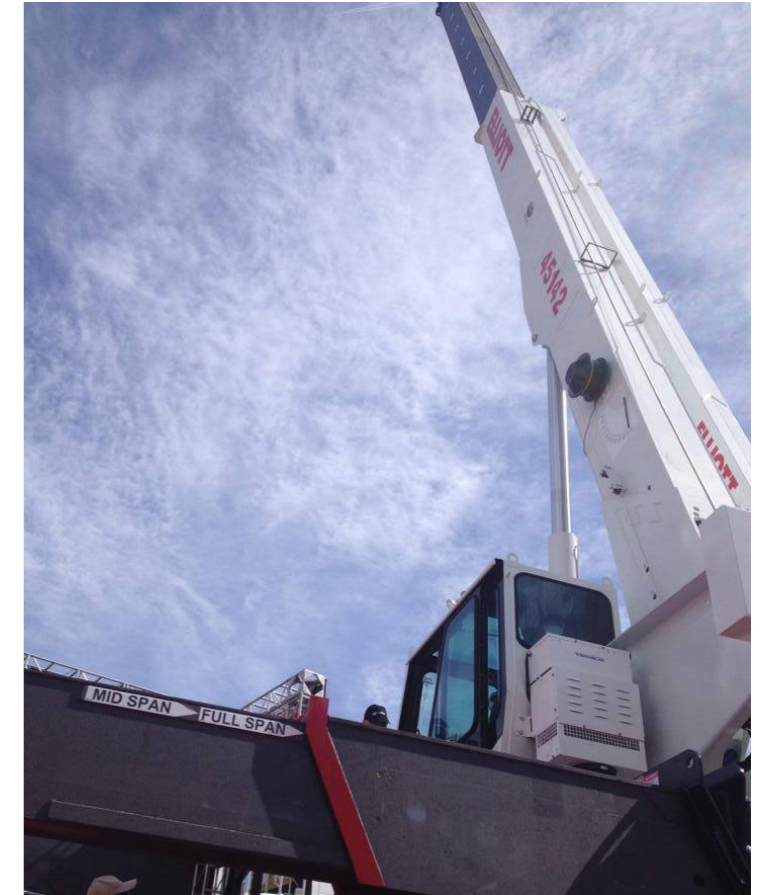

833 - CT - SPECS
www.customtruck.com

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

