


## **STOM** LOAD KING PREMIER FIBERGLASS ROOFING CONVEYOR

AVAILABLE FROM 31-43'

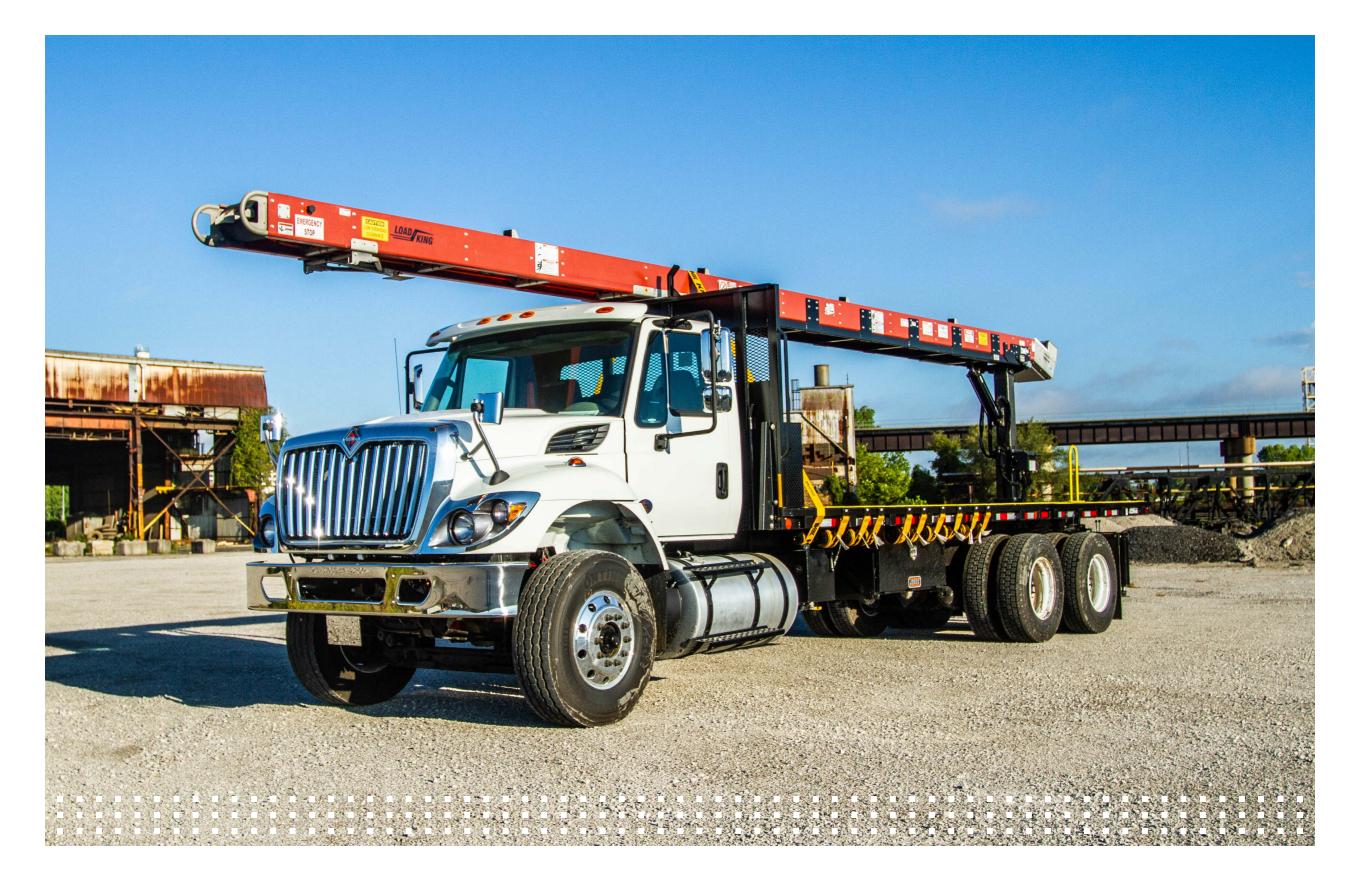

## **SPECS**

**HEAD SECTION:** 

ALL ALUMINUM CONSTRUCTION W/ 1/4" BELT LAGGING
FOUR BOLT PILLOW STYLE BEARING HOLDERS
STAINLESS STEEL SUPPORT PLATES & HINGED COVER
EMERGENCY STOP

TAIL SECTION:

ALL STAINLESS STEEL CONSTRUCTED GUARDS, UTILIZES A STEEL V-GUIDED BELT PULLY

OPTION:

ALUMINUM & STEEL COMBO OR ALL STEEL - 24' - 28' OVERALL BED SPACE

CRADLE:

17' STEEL 1-PIECE HEAVY DUTY CONSTRUCTION, SUPPORTS CONVEYOR OR FRAME STRUCTURE

BELT:

PVC NON-CONDUCTIVE BELTING STAINLESS STEEL PADDLES BELT SPEED = 60' A MINUTE

CROSS SUPPORTS:

STAINLESS STEEL CONSTRUCTION -

RUBBER - COATED RETURN IDLER WHEELS EQUIPPED W/ BEARINGS
HYDRAULIC HOSE ROUTING THROUGHOUT FRAME STRUCTURE IS CAPTIVE IN HOLDERS
ALL STAINLESS STEEL HARDWARE, BOLTS, NUTS, ETC. HYDRAULIC STABILIZERS

360° ROTATION ERGONOMIC CONTROLS

ROTATIONAL GEAR BOX IS FIXED FOR LONGER HOSE LIFE

10' INTEGRATED SUB-BASE & MOUNTING DECK DESIGNED TO CARRY OPTIONAL FORKLIFT KIT

MAST CLEARANCE UP TO 70" BELT LOADED HEIGHT 18" +

FLUSH MOUNTED ROTATION COVER FOR EASIER

ACCESS TO ROTATION SYSTEM, NO STEEL PLATE TO TRIP OVER







888-925-0858 www.customtruck.com



<sup>\*</sup>Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.