



# LOAD KING 352-SS SIGNATURE SERIES TRAILER

35-TON HYDRAULIC DETACHABLE GOOSENECK WITH STINGER BAR  
AND FLIP AXLE CAPABILITIES





# SPECS

## DIMENSIONS:

35 TON CAPACITY IN 12 FOOT LOAD CONCENTRATION @ 60 MILES PER HOUR

100,000/80,000 PSI YIELD STRENGTH STEEL CONSTRUCTION

17,900 ESTIMATED BASE UNIT WEIGHT

10 FOOT 9 INCH GOOSENECK LENGTH

84 INCH SWING CLEARANCE

26 FOOT DECK LENGTH, 102 INCH DECK WIDTH

24 INCH LOADED DECK HEIGHT

8 INCH LOADED GROUND CLEARANCE

30" SPRING ASSISTED FRONT FLIP RAMPS

51 INCH 5TH WHEEL HEIGHT

## GOOSENECK:

NON-GROUND BEARING GOOSENECK DESIGN

WET KIT OPERATION, LESS TRACTOR PORTION

HYDRAULIC SELF-LIFTING DETACHABLE GOOSENECK ABLE TO LIFT ABOVE OR BELOW TRANSPORT POSITION

HYDRAULIC FRAME LIFT SUPPORT

AIR-ACTIVATED, SELF-LOCKING PIN ON GOOSENECK, POSITIVE LOCK

GOOSENECK CONTROLS LOCATED AT REAR OF GOOSENECK FOR EASY ACCESS

RATCHET SYSTEM ENABLES MULTIPLE DECK HEIGHT SETTINGS

REAR FACING WORK LIGHTS MOUNTED ON GOOSENECK

## DECK:

4 FULL DEPTH 16" CAMBERED DECK BEAMS

HEAVY DUTY I-BEAM CROSSMEMBERS ON 24" CENTERS

6 D-RING PER SIDE OF DECK

12 FULL DEPTH SWING OUT OUTRIGGERS PER SIDE FOR 2 INCH BOARDS APITONG

2 INCH APITONG OUTER (CENTER PORTION OPEN)

30 DEGREE RADIUS REAR DROP, ¾ HEIGHT REAR BOLSTER

## SUBFRAME:

AIR RIDE SUSPENSION

TWO 27,500 LB AXLES

54 ½ INCH AXLE SPACING, SPRING BRAKES AND 2S 1M ABS SYSTEM

EIGHT 255/70R22.5 TIRES

EIGHT 8.25 X 22.5 HUB PILOTED BUDD TYPE DISC WHEELS

OIL SEALS


16 ½ INCH 7 INCH BRAKES

AUTO SLACK ADJUSTERS

STANDARD 3 TAIL LIGHT PACKAGE

WIDE LOAD SIGN POCKETS (NO SIGN)

EXCAVATOR CUTOUT BOTTOM, PLATED TO 1ST AXLE

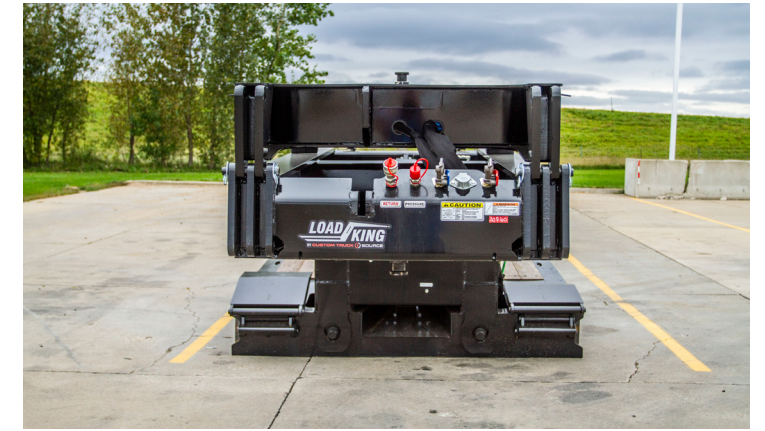

833-955-7732  
[www.loadkingmfg.com](http://www.loadkingmfg.com)

**LOAD KING**  
BY CUSTOM TRUCK (1) SOURCE

\*Load King reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.