



LOAD KING 503-605-SS-SFF-24" SIGNATURE SERIES TRAILER

55-TON HYDRAULIC DETACHABLE GOOSENECK WITH STINGER BAR & FLIP AXLE CAPABILITIES



SPECS

DIMENSIONS:

120,000 LB CAPACITY IN 12' LOAD CONCENTRATION
100 KSI/80 KSI MINIMUM YIELD STEEL CONSTRUCTION
22,700 LB. ESTIMATED BASE UNIT WEIGHT
26 FOOT DECK LENGTH, 102 INCH DECK WIDTH

GOOSENECK:


12' 9" GOOSENECK LENGTH WITH CONNECTIONS FOR FUTURE FLIP BOX
4 POSITION RATCHET FOR MULTIPLE RIDE HEIGHTS
51" FIFTH WHEEL HEIGHT
AIR ACTIVATED SELF-LOCKING PIN ON GOOSENECK, WITH POSITIVE SAFETY LOCK
HYDRAULIC FRAME LIFT SUPPORT
REAR FACING WORK LIGHTS ON GOOSENECK

DECK:

PERIMETER DESIGNED WITH FULL DEPTH 16 INCH BEAMS
2 INCH APITONG FULL WIDTH
26 FOOT DECK LENGTH
13 PAIRS OF CHAIN SLOT TIE-DOWNS IN OUTER UPPER FLANGES
24 INCH LOADED DECK HEIGHT WITH 8 INCH GROUND CLEARANCE
FLAG POCKETS FRONT OF DECK AND REAR OF TRAILER
2 INCH APITONG (NOMINAL) IN TRACK AREA, BOLTED AT ALL BOARD ENDS
13 PAIRS OF FULL DEPTH SWING-OUT OUTRIGGERS
6 PAIR OF D-RINGS ON THE SIDES OF THE DECK
30" FRONT SPRING ASSISTED FLIP RAMPS
60" PIERCED STEEL TOOL BOX AT FRONT OF DECK

SUBFRAME:

FRAME REINFORCING FOR MAXIMUM OF 5 AXLES
AIR RIDE SUSPENSION WITH AUTOMATIC & MANUAL HEIGHT CONTROL
AIR LIFT THIRD AXLE
(3) 27,500 LB. (NOMINAL) AXLES - 5" X 3/4" WALL
3RD TAIL LIGHT PACKAGE
(12) 275/70R22.5 16 PR RADIAL TIRES - FIRESTONE
(12) 8.25 X 22.5 HUB PILOTED STEEL DISC WHEELS

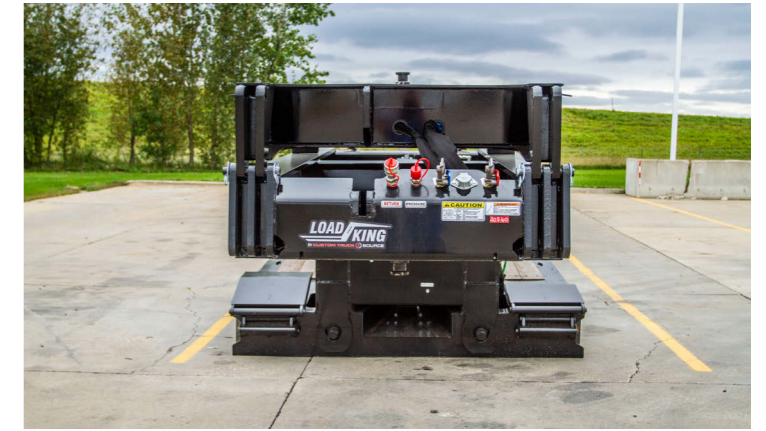

833-955-7732
www.loadkingmfg.com

LOAD KING
BY CUSTOM TRUCK (1) SOURCE

*Load King reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.