



SHERMAN+REILLY BWT-1545

BULLWHEEL TENSIONER



SPECS

TENSIONING CAPACITY, MAX.: 5,000 LBS.

BULLWHEEL DIAMETER: 54 IN. DIA.

BULLWHEEL BRAKES: 36 IN. ALUMINUM-BRONZE (HYDRAULIC CONTROL)

NUMBER OF GROOVES: 5 – CAST SOLID URETHANE

GROOVE DIAMETER: 2 IN. PRECISION MACHINED

BULLWHEEL LINING: URETHANE CAST

BULLWHEEL TYPE: PRECISION MACHINED

FAIRLEAD ROLLERS: ADJUSTABLE URETHANE

REEL CARRIER: 96 IN. X 54 IN., 12,000 LB.

REEL SUPPORTS: SEALED BALL BEARING, QUICK RELEASE

PAYOUT BRAKE: 16 IN. ALUMINUM-BRONZE (HYDRAULIC CONTROL)

TRAILER BRAKES: ELECTRICAL (AIR W/ABS OPTIONAL)

DIMENSIONS:

LENGTH (APPROX.): 23 FT.

WIDTH (APPROX.): 8 FT.


HEIGHT (APPROX.): 9 FT. 10 IN. LOADED WITH 96 IN. REELS

WEIGHT (APPROX.): 12,850 LBS. (NOT LOADED)

AXLES: (2) 12,000 LB.

WHEELS: (4) 17.5x6.75 HC

TIRES: (4) 245-70R-17.5-L

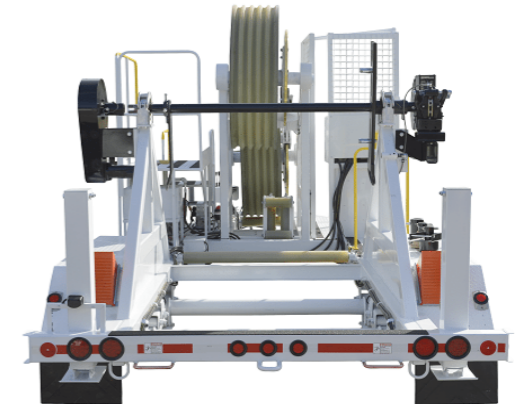

888-925-0858

www.customtruck.com

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

