



LOAD KINGTM
BY CUSTOM TRUCK (i) SOURCE

**LOAD KING
STINGER**

25-92



THE LOAD KING STINGER 25-92 IS BUILT FOR DURABILITY AND EVERYDAY USE. THIS WORK-HORSE CRANE IS KNOWN FOR TROUBLE-FREE OPERATION OVER ITS LIFETIME.



SPECIFICATIONS

FOUR-SECTION FULL POWER FULLY SYNCHRONIZED TELESCOPIC KEEL BOOM

BOOM ELEVATION ANGLE RANGE(MIN/MAX): -8° / 82°
BOOM UP / DOWN TIME: 34 / 30 SECONDS
BOOM EXTENSION / RETRACTION TIME: 84 / 52 SECONDS
BOOM LENGTH: 92 FT.
BOOM MAXIMUM SHEAVE HEIGHT: 102 FT.
BOOM HEAD: QUICK REEVING

MAXIMUM SHEAVE HEIGHT:
(WITH OPTIONAL JIB 26-44 FT.) 146 FT.

370° NON-CONTINUOUS ROTATION
4 SECTION KEEL BOOM DESIGN
COLOR CODED LOAD CHART

OPERATOR CONTROLS AND OPERATOR AID

HOIST LINE PULL (1ST LAYER): 11,400 LB.
HOIST LINE SPEED (3RD LAYER): 186 FT./MIN.
ROPE DIAMETER: 9/16 IN.
BREAKING STRENGTH: 33,600 LB.
OVERHAUL BALL: 7 US T
1 SHEAVE BLOCK: 17.5 US T




FEATURES

25 US T @ 5 FT.
102 FT. MAXIMUM TIP HEIGHT
26-44 FT. OPTIONAL JIB
ELECTRONIC RATED CAPACITY INDICATOR
QUICK REEVING BOOM HEAD

OPTIONAL FEATURES

TWO-STAGE JIB
ROTATION RESISTANT ROPE
MULTI-PART LOAD BLOCKS
MAIN HOIST WITH 2 SPEED MOTOR
21 FT. HEAVY DUTY WOOD AND STEEL FLATBEDS
RADIO REMOTE CONTROLS
TWO-MAN BASKET
HOIST DRUM TENSIONER
CONTINUOUS ROTATION
OIL COOLER
SINGLE FRONT BUMPER OUTRIGGER
HYDRAULIC HOSE REEL
TOOL BOX

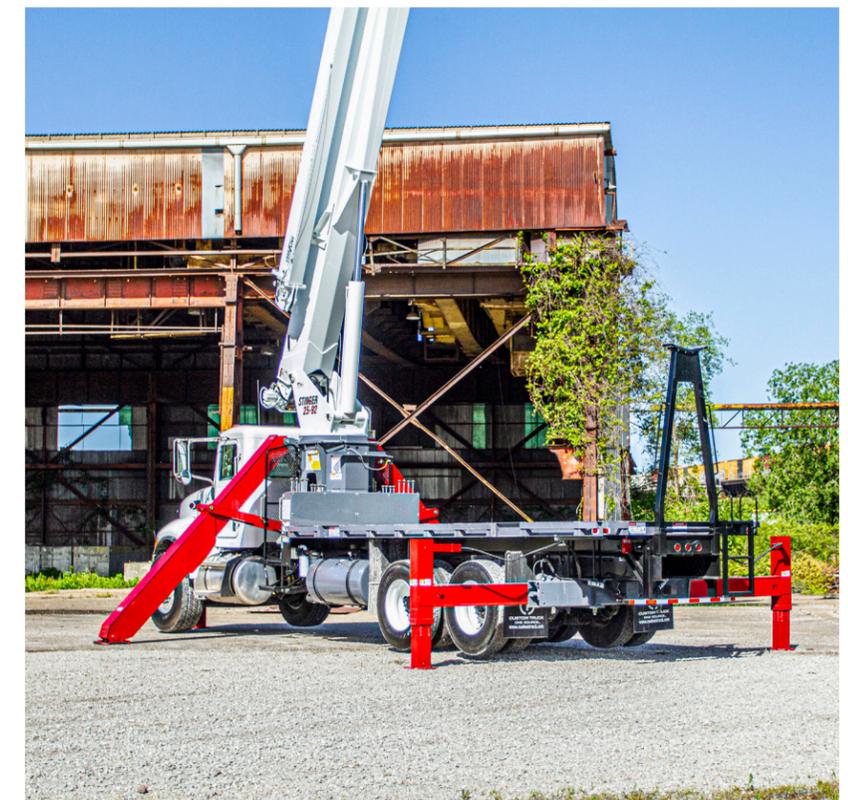



LOADKINGMFG.COM