



ELLIOTT EQUIPMENT I50F HIREACH

INSULATED AERIAL WORK PLATFORM, 55' WORKING HEIGHT



SPECS

WORKING HEIGHT: 55' / 16,8 M

WORKING SIDE REACH: 40' / 12,2 M

BOOM SECTIONS: 3

PLATFORM TYPE: INSULATED TOP-MOUNT

PLATFORM CAPACITY: 600 LB / 272 KG

PLATFORM SIZE: 40" X 60" / 102 X 152 CM

JIB WINCH CAPACITY: 500 LB / 227 KG

MAIN WINCH CAPACITY: 3,650 LB / 1656 KG

OUTRIGGER TYPE FRONT: A-TYPE

OUTRIGGER SPREAD FRONT: 12'6" / 3,8 M

OUTRIGGER TYPE REAR: A-UNDERSLUNG


OUTRIGGER SPREAD REAR: 8' / 2,4 M

UNIT WEIGHT (BARE): 11,500 LB / 5216 KG

OVERALL HEIGHT: 11'6" / 3,4 M

RECOMMENDED CAB TO AXLE (CA): 120" / 305 CM

RECOMMENDED GVWR: 25,999 LB / 11 793 KG

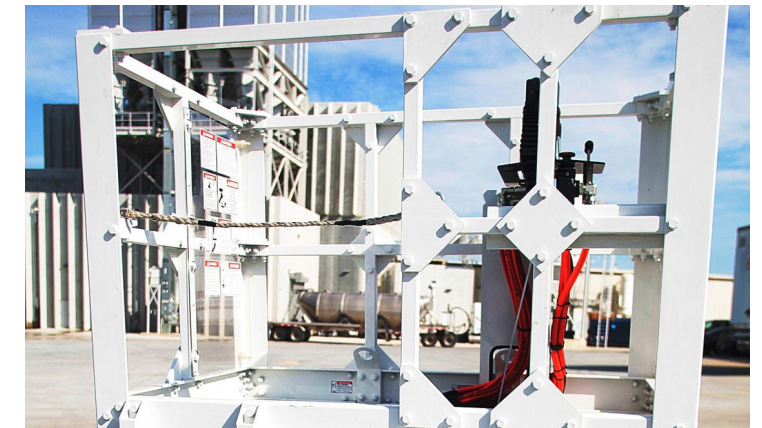

888-925-0858

www.customtruck.com

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

