


PALFINGER T50 HOOKLIFT

WITH 50,000 LB CAPACITY

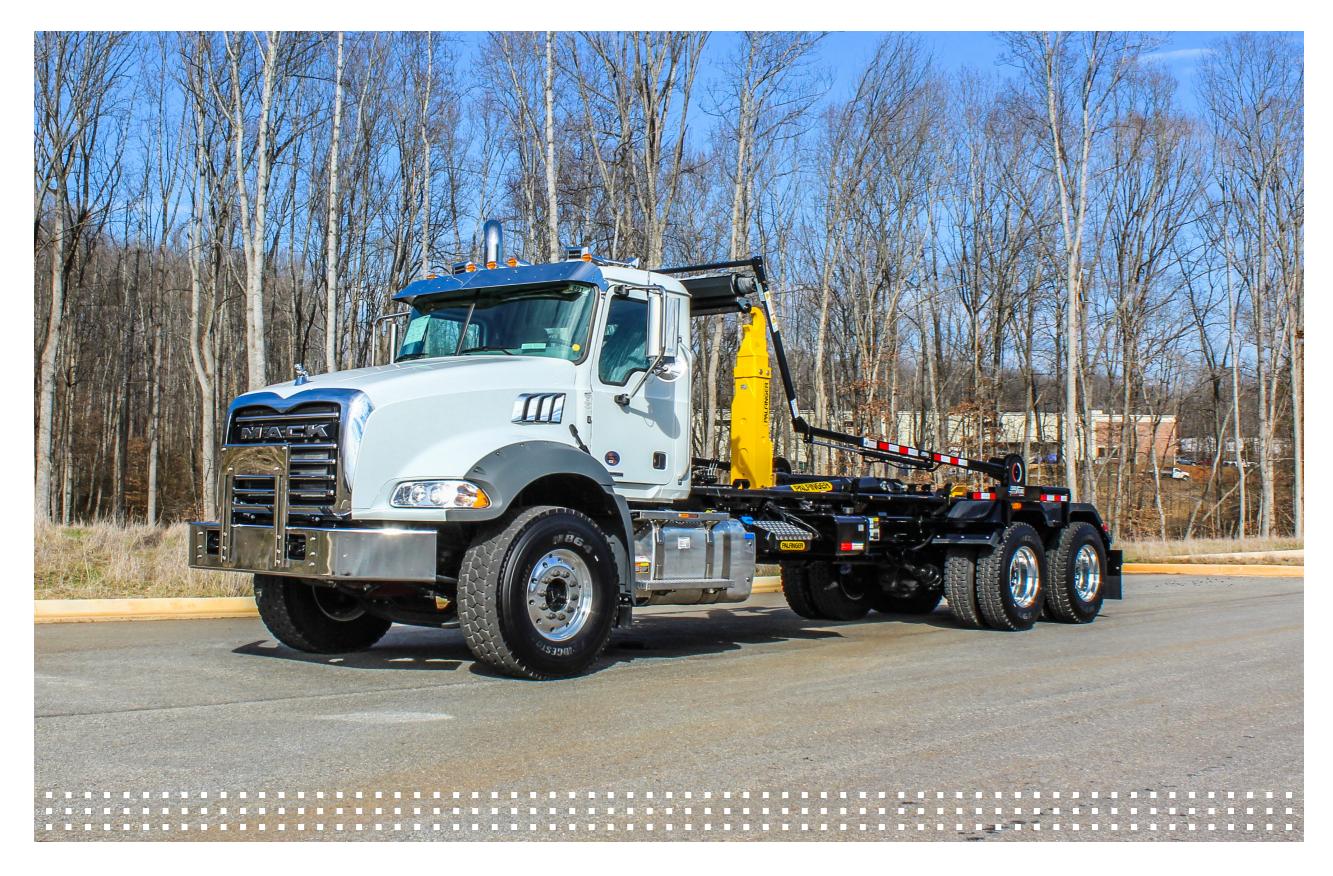

SPECS

LIFT / DUMPCAPACITY (LB.): 50000

CA RANGE (IN.): 185-195"

OPTIMUM CA (IN.): N/A

MIN. GVWR (LB.): 64000

HOOKLIFT LENGTH: 237

CLEAR FRAME RAIL (IN.): 242

BODY LENGTH RANGE (FT.): 16-22'

OPTIMUM BODY LENGHTS (FT.): 20-22'

JIB HEIGHT (IN.): 54" & 61.75"

JIB ACTION: TELESCOPIC

MAX. DUMP ANGLE: 48 DEGREES

PIVOT: DUAL

OF LIFT / DUMP CYLINDERS: 2/2

OPERATING PRESSURE (PSI): 4500

PUMP TYPE: PISTON/DIRECT MOUNT

FITTING HOSES: JIC/SAE

SHIPPING WEIGHT (LB.): 5280

PAINT: FINISH COAT

CONSTRUCTION: A514 (T-1)







888-925-0858 www.customtruck.com



^{*}Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.