




SKYLIFT SUPER 6000 LOW PRO BACKYARD DIGGER DERRICK

WITH 40-48' SHEAVE HEIGHT



SPECS

BASE: HIGH STRENGTH STEEL CONSTRUCTION
DRIVE: 2 SPEED PLANETARY REDUCTION
TRACKS: HYDRAULIC EXTENSION, RUBBER CONSTRUCTION
TRACK ALARMS: AUDIBLE ALARMS ON TRACKS/EXTEND-RETRACT
ENGINE: 25 HP TURBO DIESEL
PUMP: 16 G.P.M. GEAR DESIGN
HYDRAULIC TANK: 25 GALLON
MAX. OP. PRESSURE: 2900 PSI
BOOM ASSEMBLY: 3 SECTION ALL HYDRAULIC EXTENSION
INSULATION: 46 KV CATEGORY C / FIBERGLASS BOOM
WORK ZONE: NON RESTRICTED
STABILIZERS: OUTRIGGERS / HYBRID DESIGN - RADIAL TYPE
OUTRIGGER SAFETY INTERLOCKS
ROTATION: 440 DEGREE / HIGH STRENGTH BEARING
CONTROLS: FULL PRESSURE / RADIO REMOTE
SHEAVE HEIGHT: 40 FT. / 48 FT.
AUGER DRIVE: 5800 LB.-FT WITH 18" DIAMETER AUGER
CAPACITY: 6000 LBS.
WINCH: PLANETARY / PLASMA ROPE
HANDLING: INTEGRATED BED 3000 LB. CAPACITY
AUXILIARY POWER: HYDRAULIC TOOL CIRCUIT AT GROUND
POLE CARRIERS: DUAL SIDED
WORK LIGHTS: SET OF (2) TWO

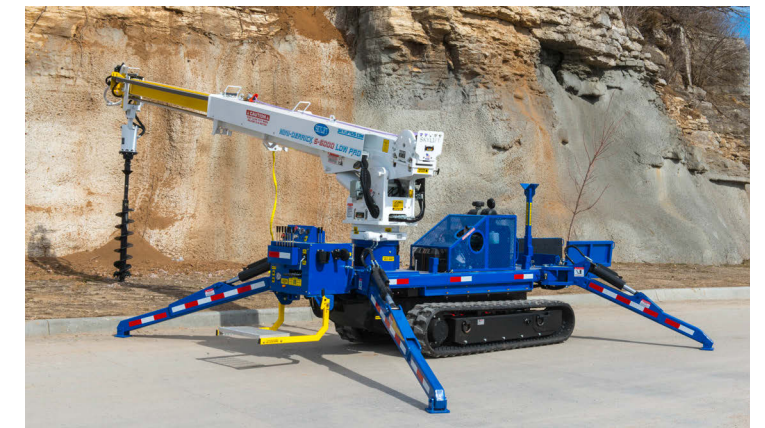

888-925-0858
www.customtruck.com

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

