

**KODIAK**  
K10 DD COMBO DIGGER DERRICK


# ***Power & Traction in Action***

***2 Man Bucket with 80 ft Reach!  
Material Handling Jib***

**UTV**  
International

# KODIAK

K10 DD COMBO DIGGER DERRICK

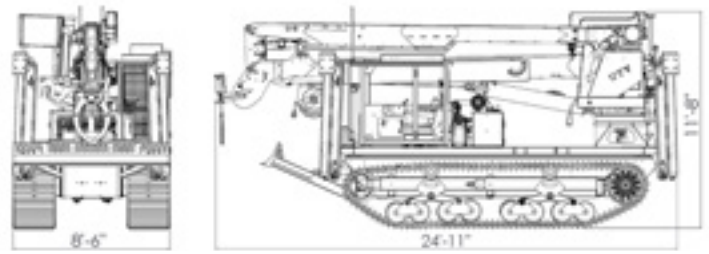

DIMENSIONS / WEIGHT	
Overall Length	299" with boom in storage position
Overall Width	102" with outriggers in storage position
Overall Height	138" with boom in storage position
Frame Height	53"
Ground Clearance	21"
Weight & Payload	
- Basic Vehicle	39,000 lbs (Base vehicle with derrick)
- Payload	3,000 lbs
Deck Area	42 ft <sup>2</sup> (approx. 72" x 84")
PERFORMANCE DATA	
Maximum speed	7.5 mph
Inside turning radius	0 ft.
Climbing Ability	
- Uphill	35° (70%)
- Side-hill	20° (36 %)
Ground Pressure (empty)	4.20 at 6" penetration
Ground Pressure (loaded)	5.32 at 6" penetration
Normal Driving Range	12 Hours (80 gallon fuel tank)
ENGINE	
Make	Kubota 09 Series
Model	V5009-TIE5
Type	4 cylinder, Tier 4, Turbo Charged Diesel
Displacement	5.0L
Horsepower	210 HP at 2,050 RPM
Torque	651 ft-lbs at 1,500 RPM
Muffler with spark arrestor	Yes
DEF Tank	10.5 gals.
FRAME / SUSPENSION	
Type	Corten Welded Tub
Axles	Walking beam with dual articulating bogie wheels
Wheels	Steel
<b>Suspension system comes with:</b>	
<ul style="list-style-type: none"> <li>• 2 independent idler wheels with oil bath hubs and steel face seals</li> <li>• 16 steel double wheels, 14" diameter</li> <li>• 2 x rear drive sprockets</li> </ul>	
TRACKS	
One piece 28" rubber tracks with steel reinforcements	
STEERING	
Independent dual joysticks with cable control for each track	
ELECTRICAL	
Voltage	12V 150 Amps
Battery Capacity	2 x 900 CCA
Alternator Capacity	95 Amps
OPTIONAL EQUIPMENT & ACCESSORIES	
<ul style="list-style-type: none"> <li>• Front 2 way plow</li> <li>• Hydraulic winch 20,000, 25,000 &amp; 30,000 lbs</li> <li>• Side tool box</li> <li>• Closed cab with heater</li> <li>• Air conditioning</li> <li>• Cab brush guards</li> <li>• Additional lights</li> </ul>	<ul style="list-style-type: none"> <li>• Hydraulic tool outlets</li> <li>• Pintle hook</li> <li>• Cold start up</li> <li>• Extreme cold start up kit</li> <li>• Wooden side walls</li> <li>• Hose reel on deck</li> <li>• 12v DC emergency pump</li> <li>• Additional parts &amp; service manual</li> </ul>

### POWER TRAIN FOR HYDROSTATIC DRIVE

Transmission	Hydrostatic, 2-speed
Parking Brakes	Multi-disc, spring applied & pressure released
Service Brakes	Positive deceleration via hydrostatic transmission

### STANDARD FEATURES

- 1-Man Cab R.O.P.S.
- Intake heater for cold startup
- 2 Set of Parts & Service Manuals
- Engine block heater

### CRANE SPECIFICATIONS

48 ft. sheave height	4 way pole claw
12,000 lbs capacity tip winch	Auger over storage protection
Maximum Lifting Capacity 24,000 lbs with 2 part line	Auger digging radius 15' to 26'
7/8" Nylon winch rope with swivel hook	Up to 36" auger storage
Fully hydraulic 2 <sup>nd</sup> and 3 <sup>rd</sup> boom extension	Four hydraulic radial outriggers
	Level gauges on tower (2)

### 4<sup>th</sup> BOOM & BASKET SPECIFICATIONS


Folding 4 <sup>th</sup> boom with 2-Man Basket	180° Basket Rotator
24" x 42" x 42" Fiberglass Basket with Step	Basket Rotator, Winch, and Jib
Basket Capacity (Jib not in use) 550 lbs	Controls with Lockouts
Basket Capacity (Jib in use) 400 lbs	Controls w/High Electrical Resistant Components
Max. Jib and Winch Capacity 1,000 lbs	46 kVA Category "C" Insulated
Hydraulic Leveled Basket	Radio control
Hydraulic Jib Tilt	

### 4<sup>th</sup> BOOM & BASKET OPTIONS

Basket Liner w/Step	Hydraulically Extendible Jib
Vinyl Basket Cover with Lanyard	Tool Circuit at Basket, Manual Control
Tool Trays	

### OPTIONAL CRANE EQUIPMENT

- 16-24" Rock Auger
- 16-36" Dirt Auger
- 4'-8" Kelly bar

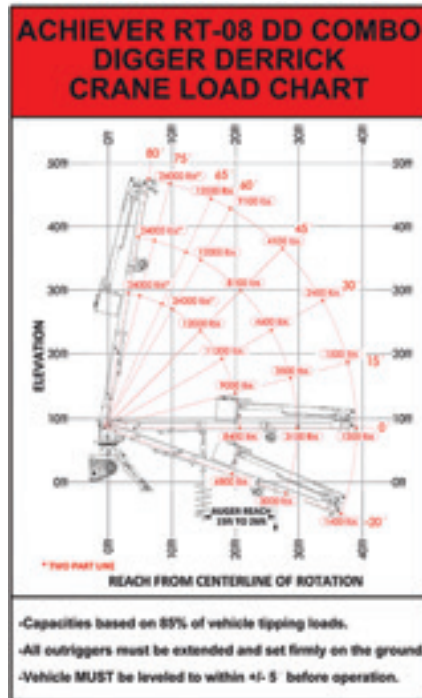

8650 Darnley Road  
Mont-Royal, Québec  
Canada H4T 1M4

1-800-985-8665 | UTVINT.COM