


## GALBREATH U5-OR-174 ROLL-OFF HOIST

WITH 60,000 lb. CAPACITY, FOR USE WITH CONTAINER SIZES 18-22'

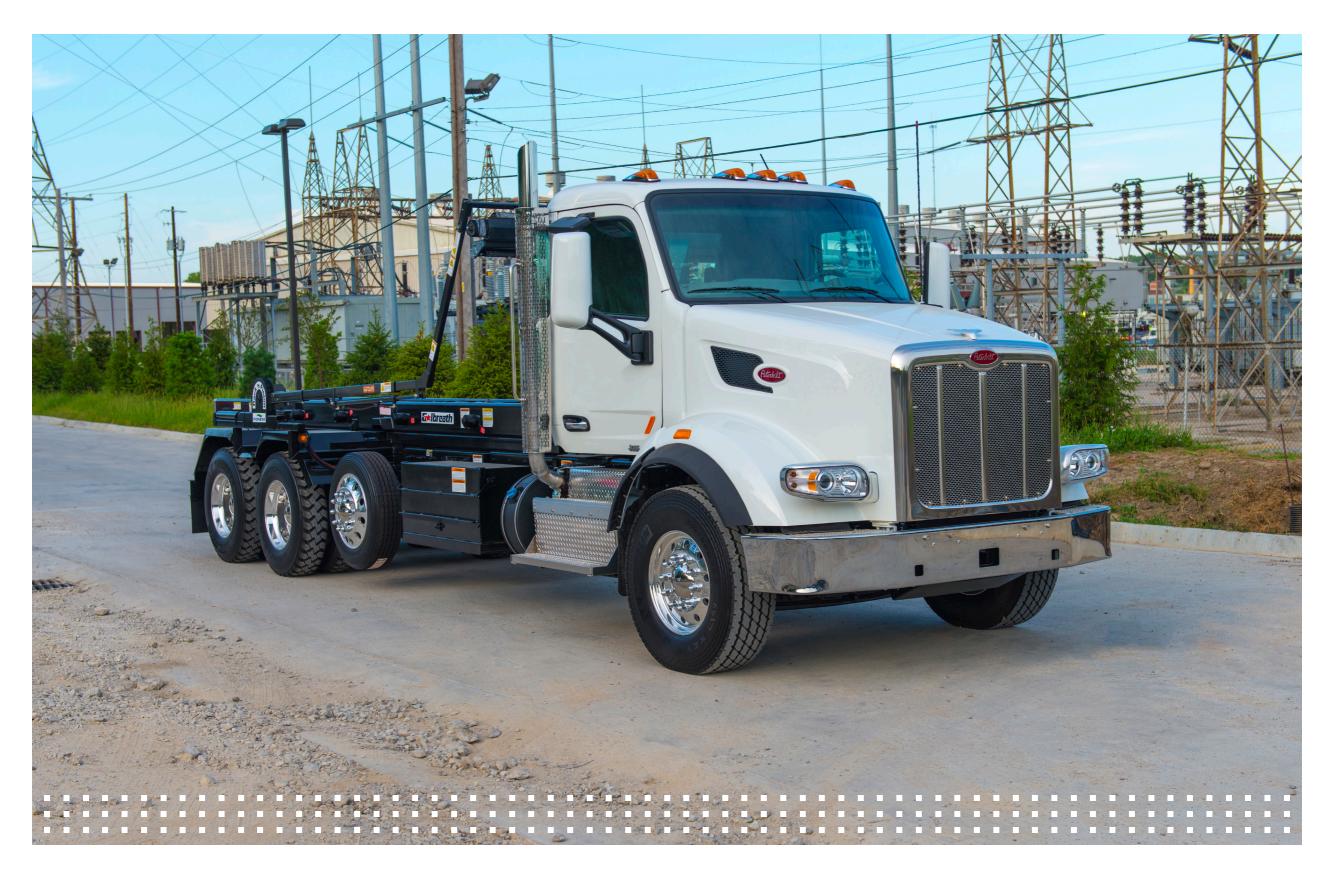

## **SPECS**

60.000 LBS, CAPACITY 174" CAB-TO-TRUNNION DIMENSION OUTSIDE RAIL INSIDE AIR CONTROLS AIR SHIFT PTO CONTOURED STEEL TANDEM FENDERS HOIST-UP ALARM BACK-UP ALARM 48" X 16" X 18" TOOLBOX RECESSED LED LIGHTS AIR ACTUATED FOLD-UP ICC BUMPER RATCHET STYLE REAR HOLD-DOWNS CENTERED CAB-MOUNT POWER TOWER PLUG-&-PLAY WIRING SYSTEM PINTLE-READY REAR APRONS STANDARD INSIDE AIR CONTROL 3-MICRON FILTRATION SYSTEM WITH DUAL VISCOSITY OIL 2-PART EPOXY PRIMER AND PAINT FIELD TESTED HEAVY DUTY REAR HINGE HOIST FRAMES HUCK-BOLTED TO CHASSIS SHOCK-ABSORBING SUB-FRAME AUTOMATIC FRONT CONTAINED SPRING-LOADED LOCKING SYSTEM & REAR CONTAINER HOLD-DOWNS **HEAVY-DUTY SAFETY PROPS** 162.5"H ABOVE TRUCK FRAME 6" BACK-OF-CAB-TO-HOIST 51-55" AXLE SPREAD 47" RAISED DUMP ANGLE 46" TOP-OF-TRUCK FRAME-TO-GROUND 96" TIRE OD TO OD 280" HOIST LENGTH 23" AFTERFRAME 6" X 4" X 72" DOUBLE ACTING LIFT CYLINDERS 2-1/2" SOLID LIFT CYLINDERS SHAFT 7" X 4" X 80" DOUBLE ACTING WINCH CYLINDERS APPROX WEIGHT: 7,562 LBS. PIONEER 4500 SARG RACK & PINION TARPER: OFFSET STABILIZER BAR

PIONEER 4500 SARG RACK & PINION TARPER:

OFFSET STABILIZER BAR

EXTERNAL CYLINDERS

NITRATED ROD CYLINDERS 36" STROKE

QUICK TARP ATTACHMENT

HYDRAULIC GANTRY

STRONGER ARMS-3/16" A5 STEEL

STRONG ARM W/ EXTENDED C CHANNEL

EXTENDED LEGS (7")

AVAILABLE ON KENWORTH T800, MACK GU813,

PETERBILT 365, PETERBILT 348 CHASSIS,

AND MORE







833 - CT - SPECS wwww.customtruck.com



<sup>\*</sup>Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.